




Brahma Board

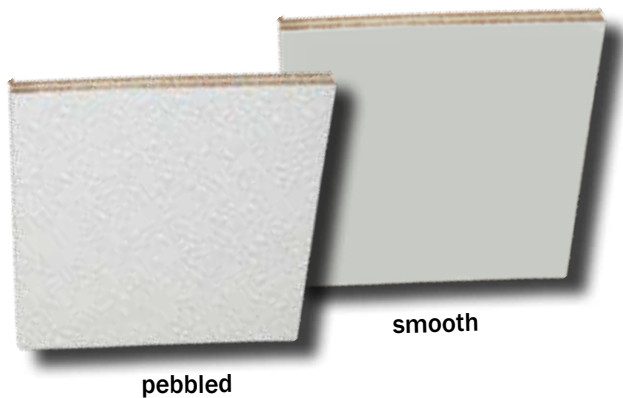

**Plastic or arborite
laminated panels for**

- **Sports & Recreation**
- **Food Industry**
- **Agriculture**
- **Commercial**

Glenway Brahma Board Panels

provide for easy maintenance and are ideal for the construction of new walls, ceiling, partitions, and flooring.

- NRP (Nylon Re-enforced Polyethylene) surface resists moisture, stains, odours and chemicals.
- The wood component of the panel provides structural strength and rigidity; therefore panels do not require any additional substrate to install. They mount directly to studs, furring strips, ceilings joists or solid surfaces.
- Easy to clean with water & soap, steam or high pressure sprayers.
- Liner panels without wood substrate are also available for installation to smooth surfaces including, plasterboard, masonry, wood or metal.
- Arborite laminated sheeting also available

FRP Laminated Plywood

Low maintenance and cost competitive. FRP is corrosion resistant, as well as stain, odour and chemical resistant. These durable panels are ideal for:

Food Industry

- Walk in freezers
- Food warehousing
- Van interiors
- Institutional kitchens
- Killing Plants

Agriculture

- Animal enclosures
- Grain storage

Sports & Recreation

- Hockey arenas
- Toboggan slides
- And more

Industry

- Garages
- Bulk trailers
- Reefers

Specifications

Surface: Pebbled or smooth glass board

Material: High impact Nylon Reinforced Polyethylene sheets laminated to first grade plywood

Thickness: Laminate from .035 - .090
Plywood from 3/8" to 1",

Size: 4' x 8' (*special sizes on request*)

Finish: Straight edged plywood

Colours: White (*colour options available on request*)

Flex strength (psi): 9200

Tensile Strength (psi): 6400

Heat resistance: to 121 ° C, 250 ° F

Thermal Conductivity: .045
(BTU in/hr/ft²/°F)

Glenway Brahma Board Panels are a must when building cold storage rooms, hog barns, processing plants, trailers, hockey arenas, partitions and more.

Glenway Brama Board Panels never need painting and stand up to abrasion.

Storage & Shipping

We usually can process and turn your order around in less than 5 working days. Why not give us a call today and let us quote on your requirements.

* All information, statements and text conclusions shown in the brochure are believed to be accurate and reliable, but are presented without expressed or implied warranty by Glenway Laminating.





Hog Barns



Processing plants



Trailers



Hockey Rinks



Feed Mills

Brahma Board Components

For a professional finish install your panels with durable and easy to use Glenway Brahma Board components.

White Vinyl Mouldings

8 ft. length (10' or 12' length, and other colours also available upon request)

Division Bar – for vertical and horizontal panel joints.

- 3/16" for FRP only panels
- 3/8" for laminated panels
- 1/2" for laminated panels
- 1" for laminated panels



End Cap – for finishing exposed panel edges and top or bottom wall moulding.

- 3/8" cap – straight
- 1/2" cap – straight
- 1" cap – straight
- 3/8" cap .5 x 1" leg
- 1/2" cap .5 x .9" leg



Batten Strip – two piece seem cover.

- 1 1/2" wide



U Channel – two piece seem cover.

- Angle 7/8

Outside Corner – for vertical finishing or trim on outside wall corners.

- Angle 1 1/2" x 1 1/2"



Inside Corner – for vertical corner joints and use as moisture seal at ceiling to wall and floor to wall joints.

- Angle 1 1/4" x 1 1/4"



Door Cap –

- 1 1/2" PVC door cap

Stainless Screws, common drive screw shank.

Stainless steel is used where higher shear strength is needed. Robertson head for positive drive.

- 3/16" x 1" Screw
- 3/16" x 1.5" Screw
- 3/16" x 2" Screw



**Note this is a listing of the most used components; others may also be available on request.*

DESCRIPTION	UPC
7/16" Lam. Joiner Strip	800952 00060 4
3/8" Lam. I/S Corner	800952 00061 1
3/8" Lam. O/S Corner	800952 00062 8
Door Jam	800952 00063 5
Glassboard Joiner	800952 00064 2
3/8" Laminate Joiner	800952 00065 9
PVC Door Cap	800952 00066 6
3/8" Laminate J-Trim	800952 00067 3
1/2" Laminate J-Trim	800952 00068 0
3/8" Pebbled Laminate	800952 00069 7
3/8" Smooth Laminate	800952 00070 3
7/16" Pebbled Laminate	800952 00071 0
7/16" Smooth Laminate	800952 00072 7
3/8" Fiberglass Laminate - Smooth	800952 00073 4
3/8" Fiberglass Laminate - Pebbled	800952 00074 1



Glenway Laminating has been in business since 2002. Our panels are produced to meet the high industry standards. First layer of glue is applied directly to the 4' x 8' plywood panels. Then slightly oversized NRP panels are overlaid. The glued panels are then transferred to one of our presses and allowed to cure for up to 8 hours. Each press holds a complete skid load. Panels are then removed for the final trim. Special sizes and trim to suit the customer's specific requirements are also available on request.



Quality Control

Our strict quality control is maintained throughout the assembly process. In addition we only use the best materials available to insure the customer of an excellent product with consistent specifications.



Dominion City, Manitoba

ph: (204) 427-3405

fax: (204) 427-3413

email: glaminating@gmail.com

contact: Clinton Hofer